

TAGS	
A-22,24	CIRCUIT TAG: PANEL-CIRCUIT
SL24	LIGHT FIXTURE: ID
A	SHEET NOTE (SEE SCHEDULE)


SYMBOL LEGEND	
DESCRIPTION	TYPICAL MOUNTING HEIGHT
	18" / 450MM AFF UNLESS OTHERWISE INDICATED
	18" / 450MM AFF UNLESS OTHERWISE INDICATED
	18" / 450MM AFF UNLESS OTHERWISE INDICATED
	48" / 1200MM AFF UNLESS NOTED
	60" / 1500MM AFF

SHEET NOTES E01	
NOTE	INSTRUCTION
A	DISTRIBUTE THROUGH SLAB.
B	EXTEND EXTERIOR POLE LIGHTING CONTROL SYSTEM SO THAT IN THE FUTURE, ALL LIGHTS CAN BE CONTROLLED BY ONE LOCATION. CURRENTLY, FIXTURES DENOTED "3" ARE POWERED/CONTROLLED FROM THE 3-STOREY BUILDING, "4" THE 4-STOREY, AND "T" THE TOWNHOMES ELECTRICAL SHACK.
C	ANGLE 10° CCW.


LIGHTING FIXTURE SCHEDULE									
ID	DESCRIPTION	MOUNTING	VOLTAGE	LOAD	LUMENS	MANUFACTURER	MODEL	FINISH	COUNT
L4	4' LED STRIP LIGHT - LENSED	CEILING, SURFACE	120 V	35 W	4210 lm	EATON LIGHTING	45NLED-LD5-41SL-LW-UNV-L8xx-CD1-U	REFER TO GENERAL NOTES FOR FINISH/TRIM DETAILS	1
P3	POST TOP AREA LIGHT	POLE	120 V	102 W	8206 lm	EATON LIGHTING	PMM-F04-LED-E-U-T3	HEAD FINISH TO MATCH POLE	4
P4	POST TOP AREA LIGHT	POLE	120 V	102 W	7999 lm	EATON LIGHTING	PMM-F04-LED-E-U-T4	HEAD FINISH TO MATCH POLE	6
P4+	POST TOP AREA LIGHT	POLE	120 V	78 W	6000 lm	EATON LIGHTING	PMM-F06-LED-E-U-T4	HEAD FINISH TO MATCH POLE	2
P5	POST TOP AREA LIGHT	POLE	120 V	102 W	8634 lm	EATON LIGHTING	PMM-F04-LED-E-U-SMQ	HEAD FINISH TO MATCH POLE	1
W	BUILDING MOUNT AREA DOWNLIGHT	WALL, SURFACE	120 V	12 W	1400 lm	EATON LIGHTING	XTOR1B	REFER TO GENERAL NOTES FOR FINISH/TRIM DETAILS	1

- EXTERIOR LIGHT FIXTURES FINISH/TRIM BLACK UNLESS OTHERWISE NOTED.
- POLE MOUNT LIGHT FIXTURE FINISH TO MATCH POLE. POLES POWDER COAT FLAT BLACK UNLESS OTHERWISE NOTED.


Panel: SHACK									
Location: ELECTRICAL SHACK					Supply From: STACK 1				
Mounting: Surface Mounted					Enclosure: NEMA 1				
Notes:					Panel: SHACK				
Volts: 120/208 Single					A.I.C. RATING: 10KA				
Phases: 1					100A RATED				
Wires: 3					MLO				
CKT	Circuit Description	Trip	Poles	A	B	Poles	Trip	Circuit Description	CKT
1	LIGHTS	15 A	1	46	400	1	15 A	SHAW/TELLUS	2
3	RECEPTACLES	15 A	1		700	250			4
5				250					6
7							15 A	BASEBOARD HEATER	8
9									10
11									12
13									14
15									16
17									18
				Total VA:	692 VA	950 VA			
				Total Amps:	7 A	9 A			

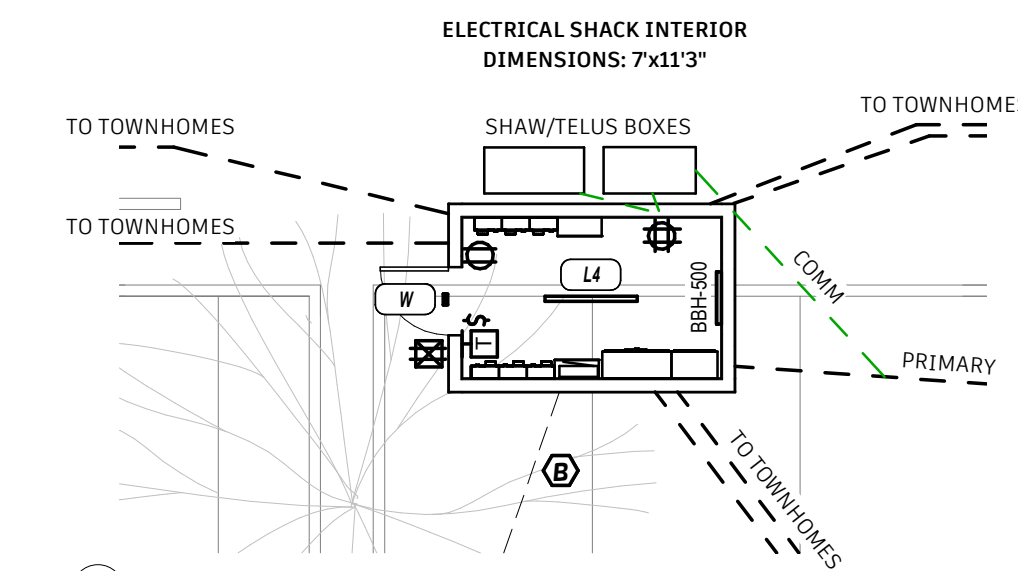


2 ELECTRICAL SHACK  
1 : 100

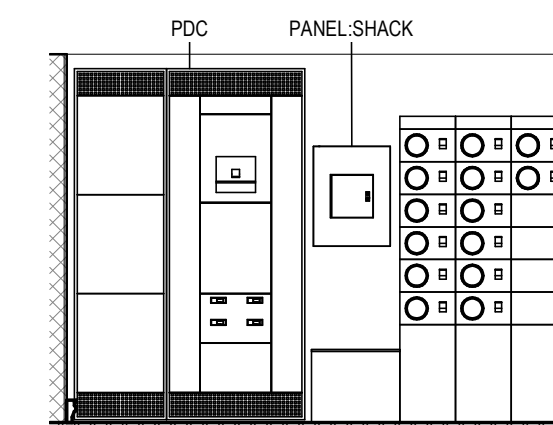


3 ELECTRICAL SHACK EAST  
1 : 50

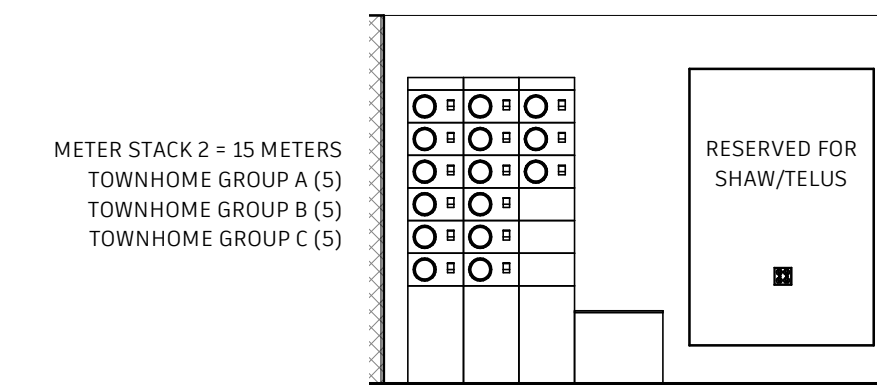

4 ELECTRICAL SHACK WEST  
1 : 50

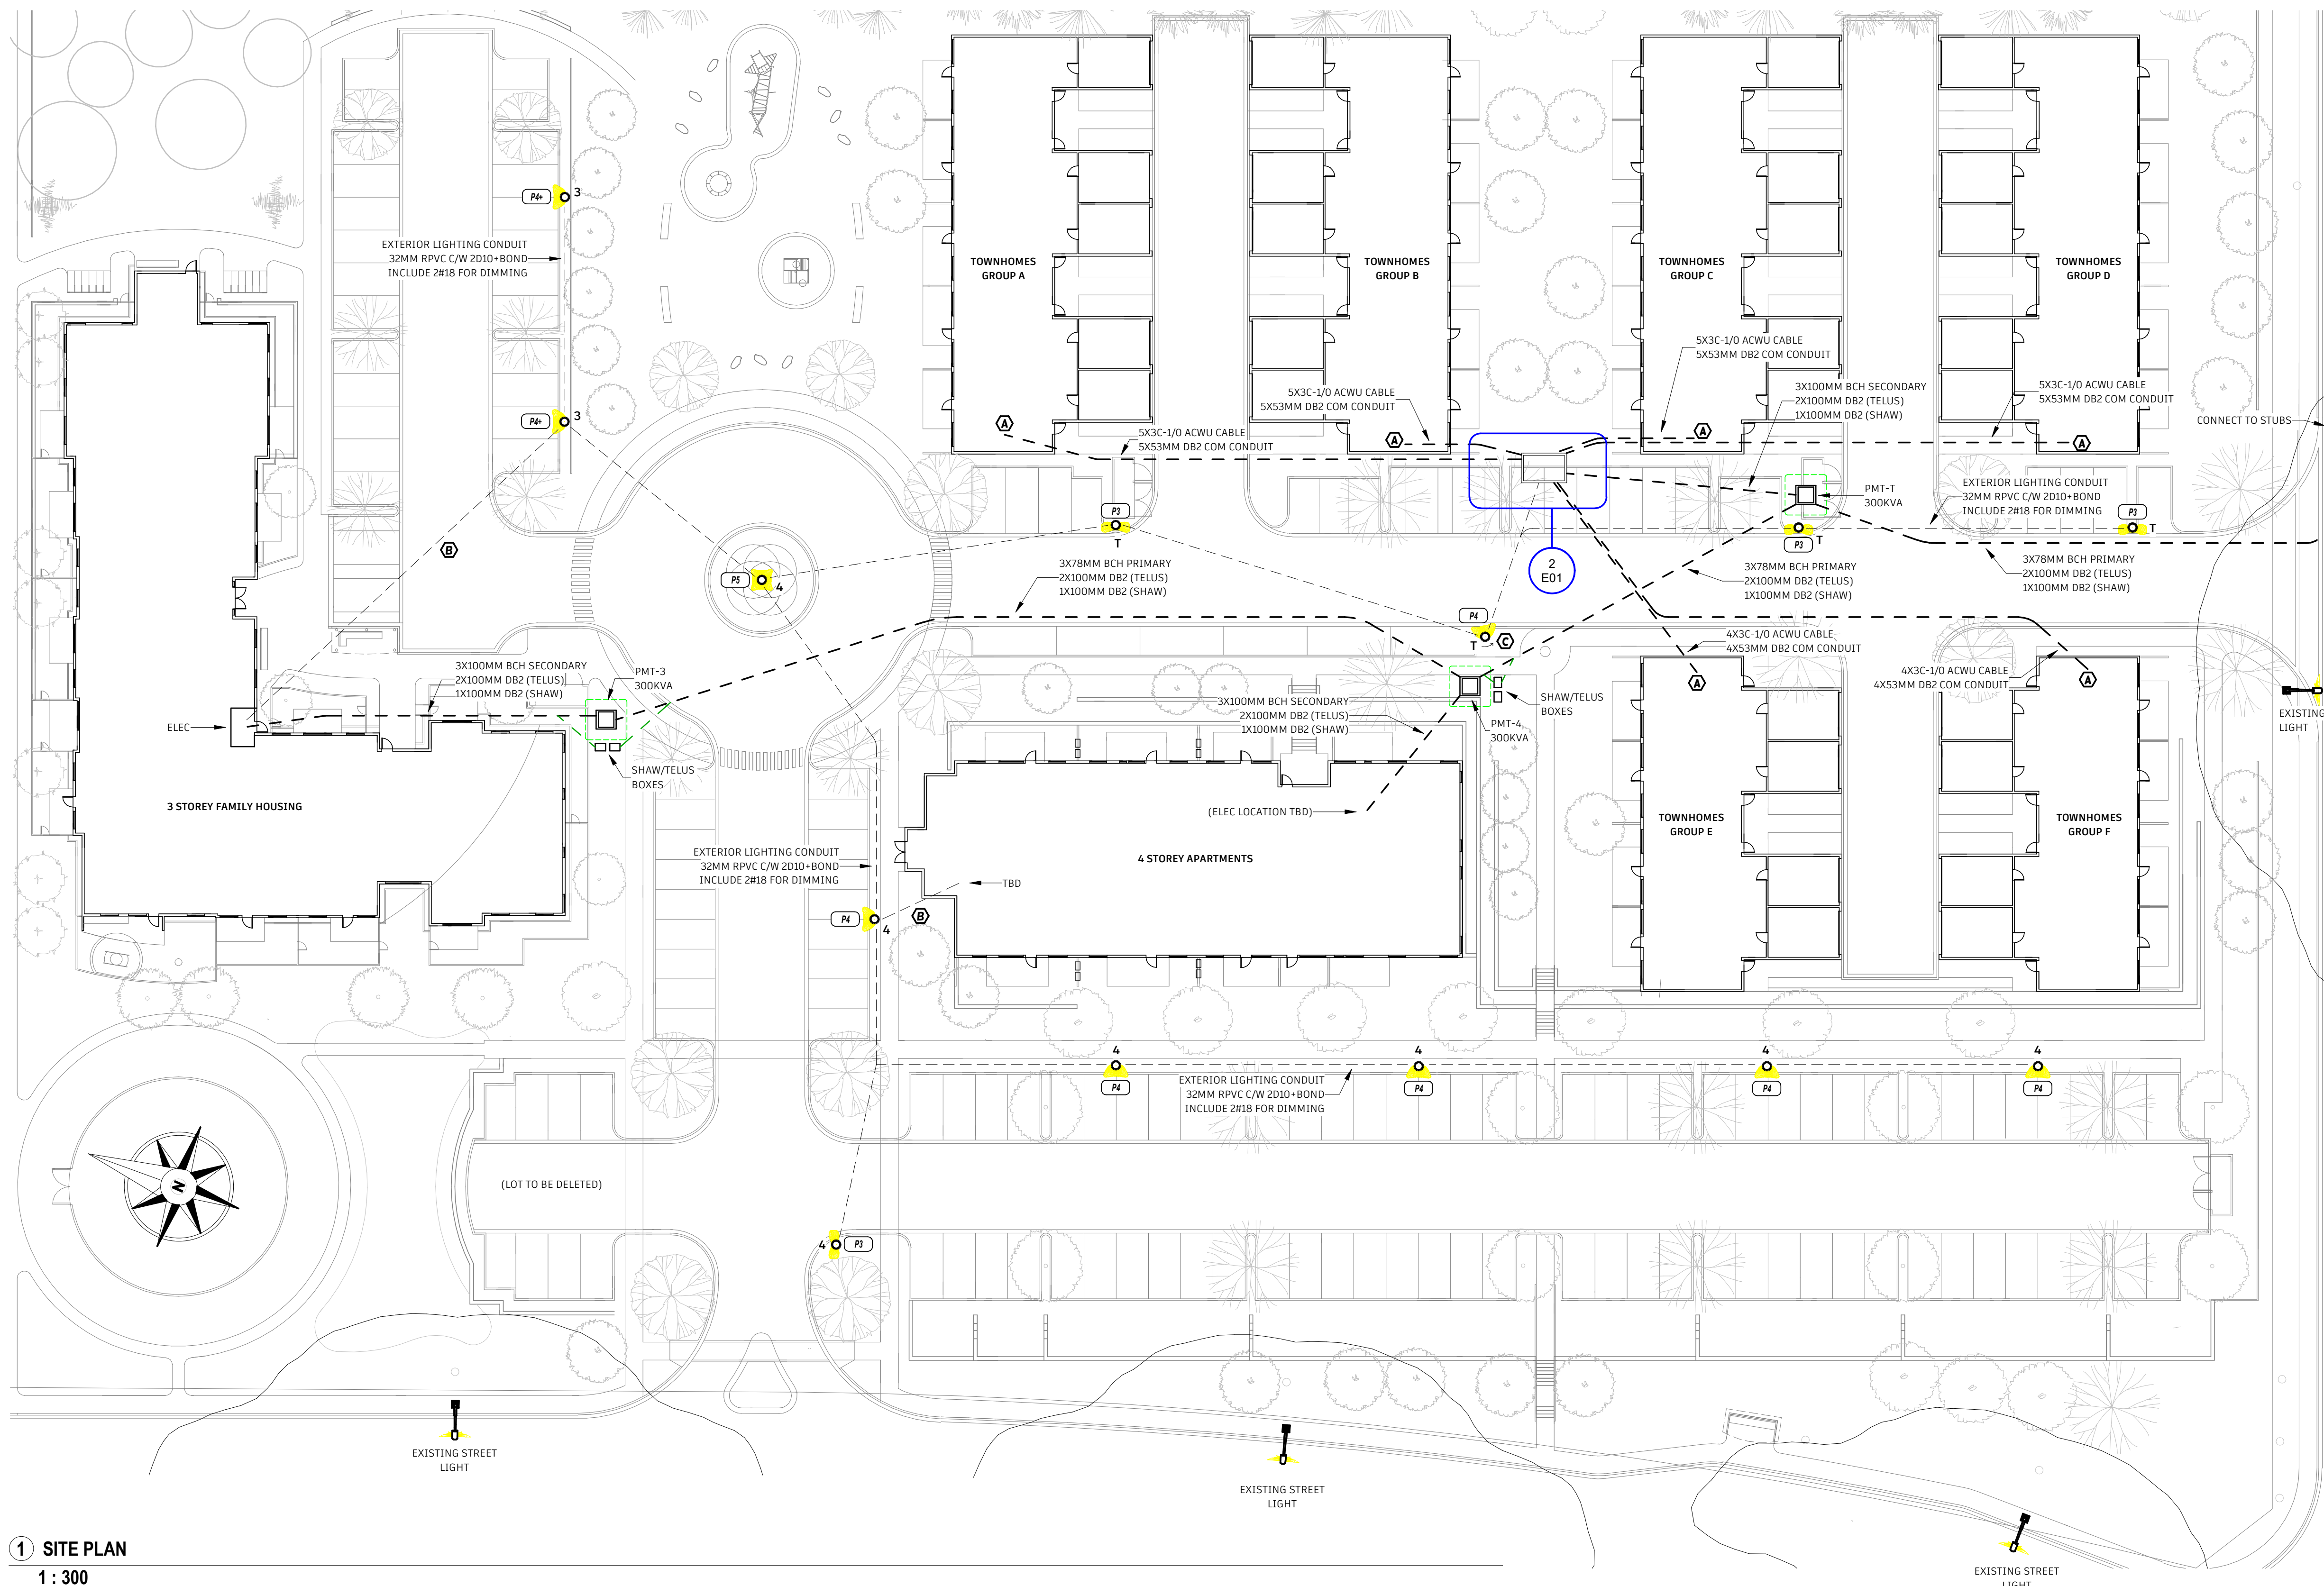

1 SITE PLAN  
1 : 300

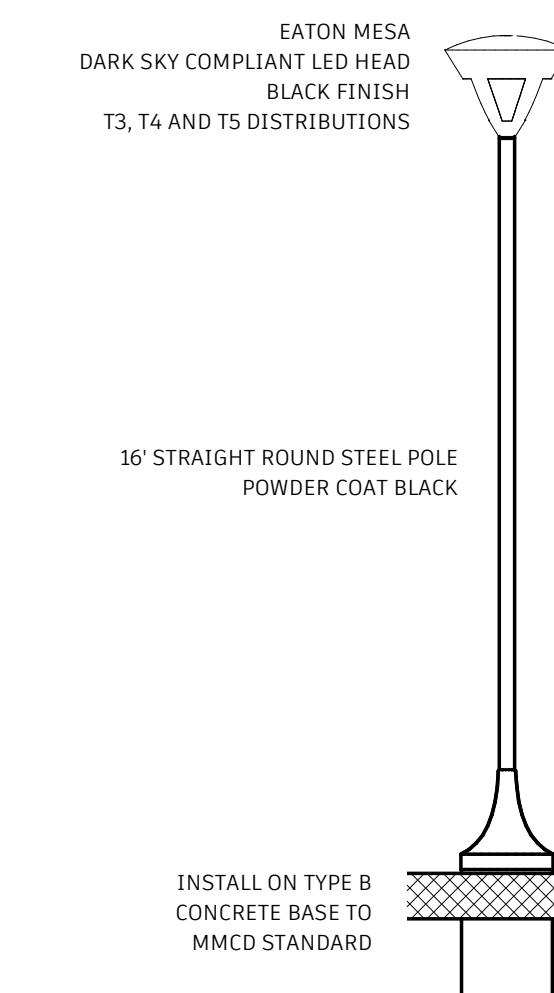

5 POLE LIGHT STANDARD  
1 : 50

COPYRIGHT RESERVED: THIS DRAWING AND ALL COPYRIGHT THEREIN ARE THE SOLE AND EXCLUSIVE PROPERTY OF THE CONSULTANT. REPRODUCTION OR USE OF THIS DRAWING IN WHOLE OR IN PART IS PROHIBITED AND MAY NOT BE USED WITHOUT THE WRITTEN CONSENT OF THE CONSULTANT.

PROJECT:

MISSION ROAD  
SITE LIGHTING

ADDRESS:

2700 MISSION  
RD, COURTENAY,  
BC

CLIENT:

MISSION ROAD  
LIMITED  
PARTNERSHIP

DESIGNED BY:

JW

DRAWN BY:

RS

SCALE:

As indicated

REVISION HISTORY

2021-06-23

A I.F. COORDINATION

REVISION: A

REVISION: A

SEAL:

SHEET TITLE:

SITE SERVICING

Project Number: 2117

SHEET OF  
E01 1